

AES16e Pin Outs

Port A

Pin	Signal	Pin	Signal	Pin	Signal
1	Clock Gnd	10	Clock In		
2	OUT4 Cold	11	OUT4 Hot	19	OUT4 Gnd
3	OUT3 Gnd	12	OUT3 Cold	20	OUT3 Hot
4	OUT2 Cold	13	OUT2 Hot	21	OUT2 Gnd
5	OUT1 Gnd	14	OUT1 Cold	22	OUT1 Hot
6	IN4 Cold	15	IN4 Hot	23	IN4 Gnd
7	IN3 Gnd	16	IN3 Cold	24	IN3 Hot
8	IN2 Cold	17	IN2 Hot	25	IN2 Gnd
9	IN1 Gnd	18	IN1 Cold	26	IN1 Hot

Port B

Pin	Signal	Pin	Signal	Pin	Signal
1	Clock Gnd	10	Clock Out		
2	OUT8 Cold	11	OUT8 Hot	19	OUT8 Gnd
3	OUT7 Gnd	12	OUT7 Cold	20	OUT7 Hot
4	OUT4 Cold	13	OUT4 Hot	21	OUT4 Gnd
5	OUT5 Gnd	14	OUT5 Cold	22	OUT5 Hot
6	IN8 Cold	15	IN8 Hot	23	IN8 Gnd
7	IN7 Gnd	16	IN7 Cold	24	IN7 Hot
8	IN6 Cold	17	IN6 Hot	25	IN6 Gnd
9	IN5 Gnd	18	IN5 Cold	26	IN5 Hot

LStream (JP1)

Pin	Signal	Pin	Signal
1	Gnd	2	Data Out
3	Gnd	4	Data In
5	Gnd	6	Frame Clk In
7	Gnd	8	Bit Clk Out
9	Gnd	10	
11	Gnd	12	
13	Gnd	14	Vcc +5V DC


Clock In (JP2)

Pin	Signal
1	Clock In
2	Gnd

Clock Out (JP3)

Pin	Signal
1	Clock Out
2	Gnd

AES16e Clock Header Connector Pin Outs

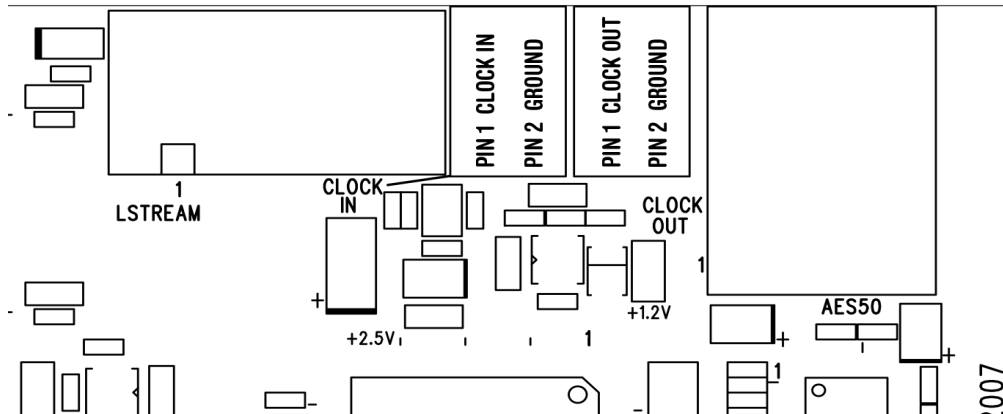

XLR Connectors

Pin	Signal
1	Gnd
2	Hot
3	Cold